


DATE: Saturday, February 21th 2022

OBJECT: Safety equipment of historic cars competing in Belgium

RACB Sport would like to remind what is the minimum equipment required to compete in Belgium, in order to avoid drivers being forced to buy new stuff on site or, at the worst being prevented from racing, which nobody likes to see.

Here are the main FIA safety rules for cars following Appendix K:

Driver equipment :

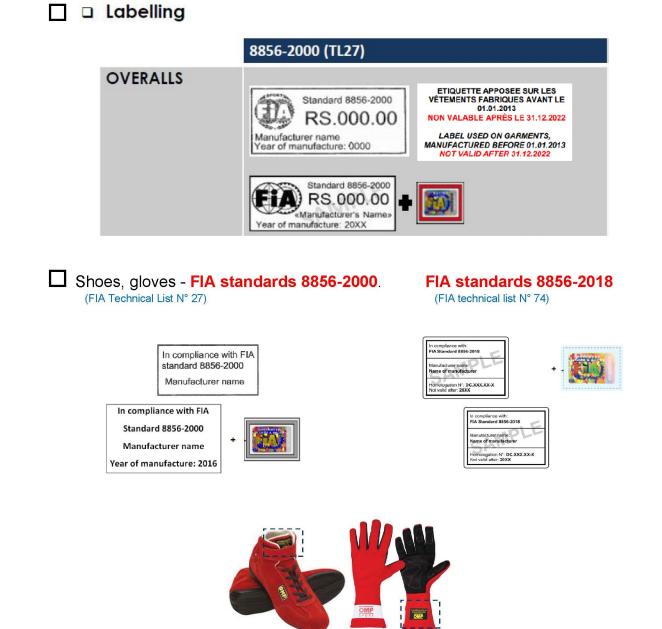

- NO REGULATION VALUE -




Underwear, balaclava

FIA standards 8856-2000.

(FIA Technical list N° 27)

FIA standards 8856-2018


(FIA Technical list N° 74)

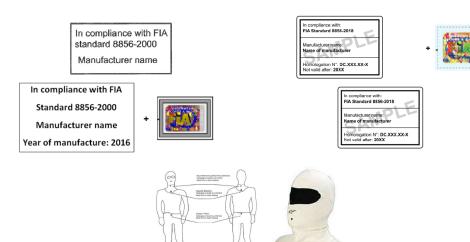

10

FIA homologated helmet:

(FIA Technical list N° 25,33, 41, 49 and 69)

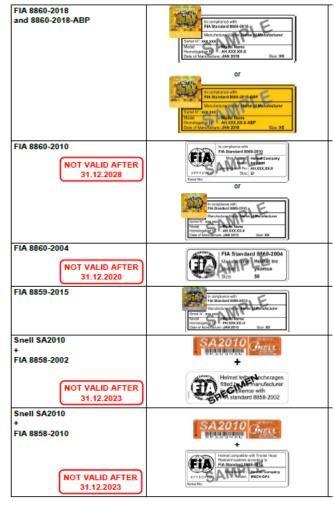

- NO REGULATION VALUE -





FIA Standard 8856-2010

(FIA Technical List FIA N° 33)




FIA Standard 8856-2010

(FIA Technical List FIA N° 49)



FIA Standard 8856-2018 (FIA Technical List FIA N° 69)

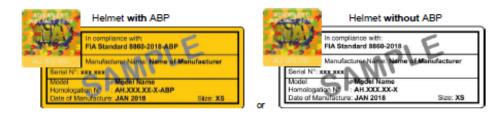




Car Equipment:

Safety harness (If required by regulation),

FIA standards 8853/98 et 8854/98 (FIA Technical List N° 24

Normes FIA 8853-2016 (FIA Technical ListN° 57)



Racing seat, if original seats are changed it must be for seat system for which the FIA Homologation is valid. (FIA Technical list N° 12 and 39)

(See mention NOT VALID AFTER xxxx)

FIA standards8855-1999 (valid 5 years)

(Liste technique FIA N° 12)



- NO REGULATION VALUE -



FIA standards 8862-2010 (valid 10 years)

(Liste technique FIA N° 40)




Handheld fire extinguisher, min 2kg powder / 2.4ltr AFFF, fixed with a purposebuilt cradle bolted to the car body and retaining metallic bands through this, as opposed to just retaining straps attached directly to the body. (FIA Technical list N° 16)



It is recommended to use installed systems (FIA technical list 16), in that case extinguisher bottle must be attached with metallic band tightened with screws.



All fire extinguishers must have been inspected within two years with the dated inspection sticker clearly visible.

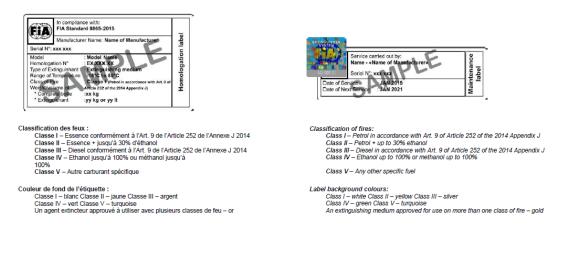

Circuit breaker controlled easily from inside by the driver seated.
(See App J – Art.253.13)

☐ Metal tow ring or towing strap, front and rear, indicated with a contrasting color arrow on the body (not for single-seat cars).

A red rain light is mandatory, mounted less than 10 cm from the car center-line of the back of the car. The light must be either incandescent and of a power of at least 21 Watts, or of LED type. (FIA Technical list N° 19)

☐ The fuel tank must be filled with safety foam. (Other than original)



FIA Standard FT3-1999

Homologation No: ysomus-74800 Manufacturer: Tank Company Serial number: 11265-12-569 Not valid after: June 2005

In case of a safety fuel tank (FT3 & FT3.5) is required or installed it must be within the validity of homologation (Appendix J Art. 253.14).


6



□ The ROPS (Roll Over Protection Structure) must conform to appendix K. (FIA Technical list № 23)



It must be padded with FIA 8857-2001 type A approved foam where driver helmet could come in contact with the ROPS.

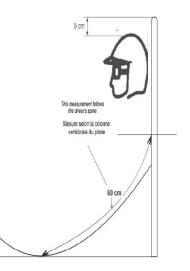

The structure in all open cars must be a minimum of 5 cm above the top of the driver's and co-drivers helmets at all times.

 \Box Two rear-view mirrors must be fitted, with min. total glass area of 90 cm₂.



FHR wearing : (Frontal Head Restraint)

The proof of "period specification" is always to be provided by the competitor.

- Is mandatory for the F1 from period G (from 01/01/1968).
- Is more than recommended for Young Timer (period J1 & J2 from 01/01/1982)
- Frontal Head Restraint [FHR system] will probably be mandatory in the coming years for all cars Old Timer as Young Timer.

(FIA Technical Lists N° 29 et 36)



ETIQUETTE APPOSEE SUR LES SYSTEMES RFT FABRIQUES AVANT LE 01.01.2013 LABEL USED ON FHR SYSTEMS MANUFACTURED BEFORE 01.01.2013

NOUVELLE ETIQUETTE EN VIGUEUR A COMPTER DU 01.01.2013 NEW LABEL IN EFFECT AS FROM 01.01.2013





- When buying new harness pay attention that some harness can only be used with the Frontal Head Restraint system. (FHR only)
- When buying new equipment, always check carefully that this equipment has the latest homologation. (FIA ISO6940, FIA-1986, ...)